


NO.	SYMBOL
1	UNIT
2	UNIT
3	UNIT
4	UNIT
5	UNIT
6	UNIT
7	UNIT
8	UNIT
9	UNIT
10	UNIT
11	UNIT
12	UNIT
13	UNIT
14	UNIT
15	UNIT
16	UNIT
17	UNIT
18	UNIT
19	UNIT
20	UNIT
21	UNIT
22	UNIT
23	UNIT
24	UNIT
25	UNIT
26	UNIT
27	UNIT
28	UNIT
29	UNIT
30	UNIT
31	UNIT
32	UNIT
33	UNIT
34	UNIT
35	UNIT
36	UNIT
37	UNIT
38	UNIT
39	UNIT
40	UNIT

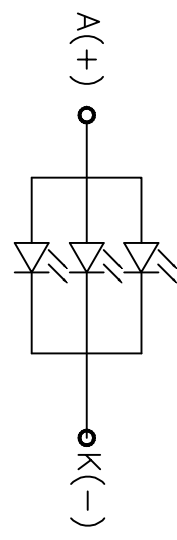

LED CIRCUIT DIAGRAM

- NOTES:
- 1.DISPLAY MODE:2.0" TFT LCD, Transmissive
 - 2.DRIVER IC:ILI9342C
 - 3.VIEWING DIRECTION:ALL O'CLOCK
 - 4.BACKLIGHT:3 CHIP-WHITE LED,IF=60mA,VF=3.2V ; BRIGTHNESS=350 cd/m2 (center)
 - 5.OPERATING TEMPERATURE:-20°C TO 70°C
 - 6.STORAGE TEMPERATURE:-30°C TO 80°C
 - 7.GENERAL TOLERANCE:±0.20

TOLERANCE	SCALE	N.T.S
.X	±	mm
.XX	±	
	± 1°	

HONSEAN 深圳市弘盛智能显示科技有限公司
SHENZHEN HONSEAN SMART DISPLAY TECHNOLOGY CO.,LTD

DRG DATE	DRG BY	APPROVED	MODEL:
	Welly	jan	HS020BI040A01N
TITLE:	P/N		

Page 1 Of 1
VER. 01