

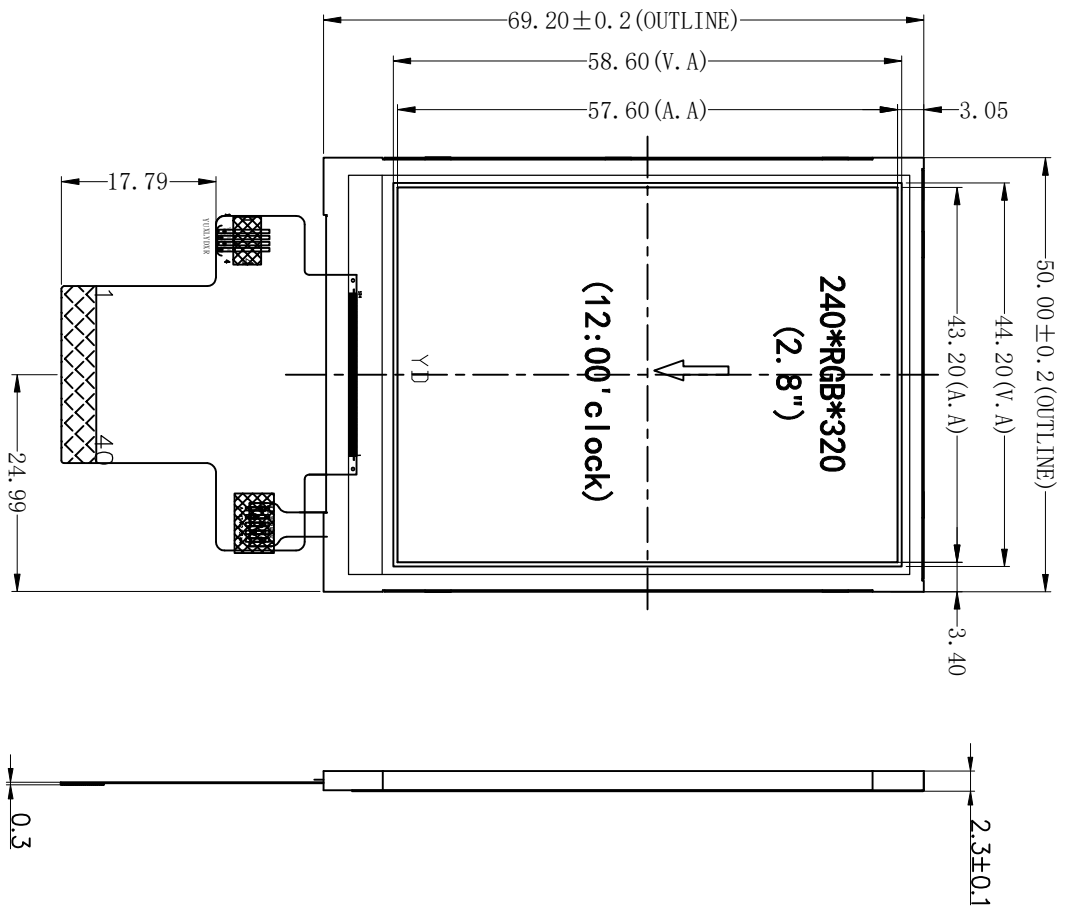



Count drawing's modified record with customer

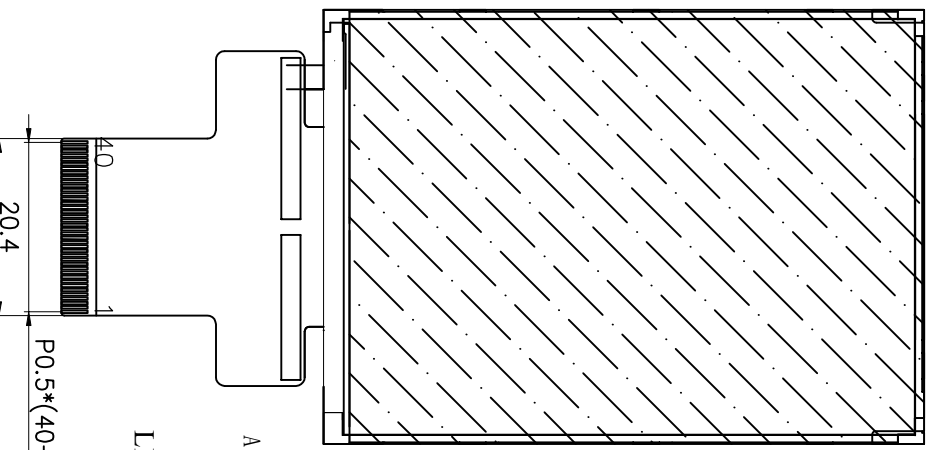

- NOTES:
1. DISPLAY MODE: 2.8" TFT LCD, Transmissive
 2. DRIVER IC: ILI9341V/ST7789
 3. VIEWING DIRECTION: 12
 4. BACKLIGHT: 4 CHIP-WHITE LED, IF=80mA, VF=3.2V
BRIGHTNESS=350 CD/M².
 5. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
 6. GENERAL TOLERANCE: ±0.20

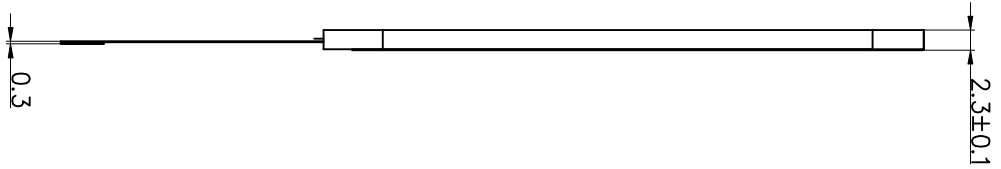

1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	IDVCC
7	CS
8	RS
9	WR
10	RD
11	NC
12	XL
13	YU
14	XR
15	YD
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB4
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	RET
32	VCC
33	IDVCC
34	GND
35	DB5
36	DB6
37	DB7
38	NC
39	NC
40	NC

TOLERANCE	SCALE	N.T.S
X ±	UNITS	mm
XX ±	MATERIAL	
∠ ± 1°		

HONSEAN 深圳市弘盛智能显示科技有限公司
SHENZHEN HONSEAN SMART DISPLAY TECHNOLOGY CO.,LTD

DRG DATE	MODEL:	BH028HI40T02R
DRG BY	TITLE:	Page 1 Of 1
APPROVED	P/N	VER. 01