


弯折示意图
弯折出货

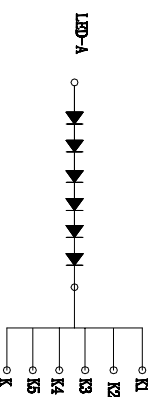

Luminance: 450/m² MIN, 500cd/m² TYP

IF=20MA VF=18±1.8V

LED CIRCUIT DIAGRAM

- NOTES:
- 1.DISPLAY MODE:2.6" TFT LCD, Transmissive
 - 2.DRIVER IC:R61531
 - 3.VIEWING DIRECTION:ALL O'CLOCK
 - 4.BACKLIGHT:6 CHIP-WHITE LED,IF=20mA,VF=18V ; BRIGHTNESS=500 cd/m² (center)
 - 5.OPERATING TEMPERATURE:-20°C TO 70°C STORAGE TEMPERATURE:-30°C TO 80°C
 - 6.GENERAL TOLERANCE:±0.20

NO.	SYMBOL
01	GND
02	DO-
03	NC
04	DO+
05	GND
06	NC
07	LCD_ID
08	NC
09	GND
10	CLK-
11	NC
12	CLK+
13	GND
14	NC
15	BLU_PWM
16	GND
17	RESSET
18	FLMARK
19	NC
20	I0VCC
21	VCI
22	GND
23	LED+
24	LED-

TOLERANCE	SCALE	N.T.S
.X	±	mm
.XX	±	
	± 1°	

DRG DATE	MODEL:
DRG BY	HS026GR24A01A-LCM
APPROVED	



深圳市弘盛智能显示科技有限公司
SHENZHEN HONSEAN SMART DISPLAY TECHNOLOGY CO.,LTD

DRG BY	TITLE:	Page 1 OF 1
Welly		
APPROVED	P/N	VER.
jan		01