
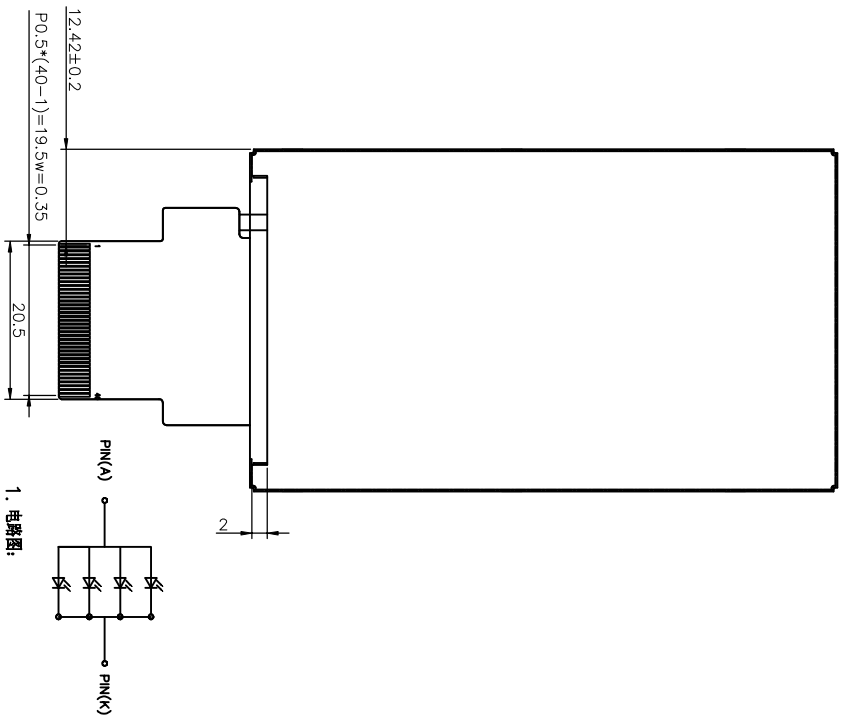
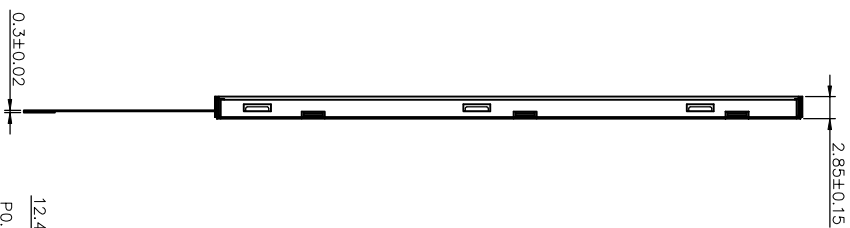


Count drawing's modified record with customer

ROHS 本图中的所有材料均
要求符合环保标准

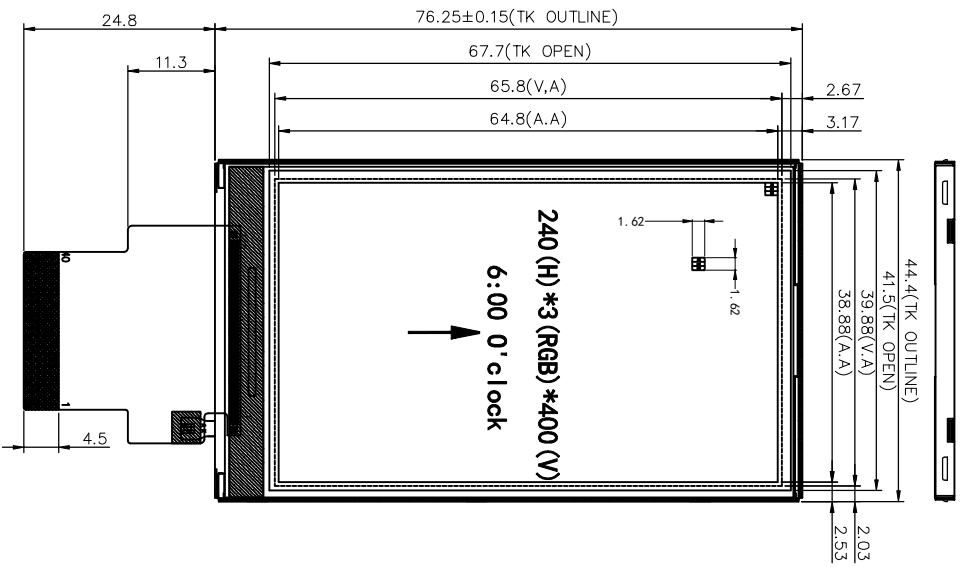

1. 电路图:
CIRCUIT DIAGRAM

1	GND
2	LED-A
3	LED-K
4	GND
5	RESET
6	VCI/3.3V
7	VCI/3.3V
8	GND
9	DB15
10	DB14
11	DB13
12	DB12
13	DB11
14	DB10
15	DB9
16	DB8
17	DB7
18	DB6
19	DB5
20	DB4
21	DB3
22	DB2
23	DB1
24	DB0
25	CS
26	RS
27	WR
28	RD
29	NC
30	TE
31	power/1.8v/3.3v
32	GND
33	GND
34	GND
35	GND
36	GND
37	GND
38	GND
39	GND
40	NC

NOTES:

1. DISPLAY MODE: 3.0 TFT LCD, Transmissive
2. DRIVER IC: ILI9326
3. VIEWING DIRECTION: 6 O'CLOCK
4. BACKLIGHT: 4 CHIP-WHITE LED, IF=15mA, VF=3.3V。
5. OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C
6. GENERAL TOLERANCE: ±0.20

TOLERANCE	SCALE	N.T.S
.X	±	UNITS
.XX	±	mm
∠	±1°	MATERIAL

HONSEAN 深圳市弘盛智能显示科技有限公司
SHENZHEN HONSEAN SMART DISPLAY TECHNOLOGY CO.,LTD

DRG DATE	MODEL:	HS030CT040A001A-1CM
DRG BY	TITLE:	
APPROVED	P/N	

Page 1 OF 1
VER. 01