Count drawing's modified record with customer				

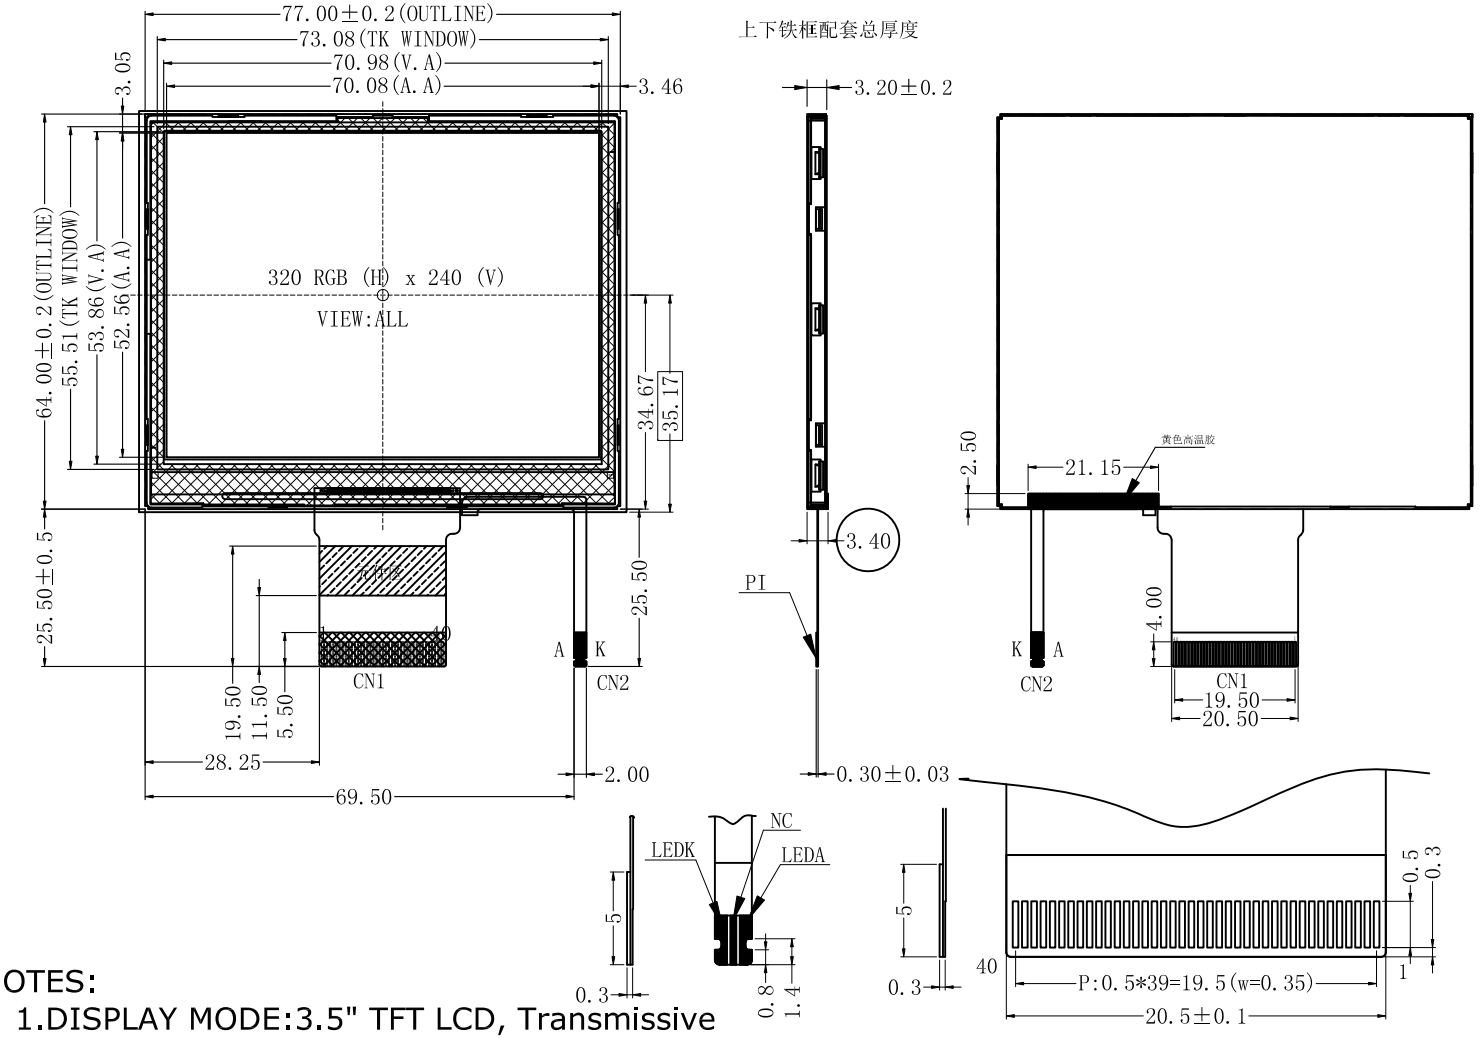

NO	SYMBOL	NO	SYMBOL
1	RL	21	DB10
2	TB	22	DB9
3	DOTCLK	23	DB8
4	VSYNC	24	GND
5	HSYNC	25	DB7
6	ENABLE	26	DB6
7	DB23	27	DB5
8	DB22	28	DB4
9	DB21	29	DB3
10	DB20	30	DB2
11	DB19	31	DB1
12	DB18	32	DB0
13	DB17	33	SDI
14	DB16	34	SCL
15	GND	35	CS
16	DB15	36	RESET
17	DB14	37	SDO
18	DB13	38	GND
19	DB12	39	VDD
20	DB11	40	VDD



电路图CIRCUIT DIAGRAM
(LED 6 SMDS)

NOTES:

1. DISPLAY MODE:3.5" TFT LCD, Transmissive
2. DRIVER IC:ST7272A
3. VIEWING DIRECTION:ALL O'CLOCK
4. BACKLIGHT:6 CHIP-WHITE LED,IF=20mA,VF=3.2V ; BRIGHTNESS=350-400 cd/m2 (center)
5. OPERATING TEMPERATURE:-20°C TO 70°C
   STORAGE TEMPERATURE:-30°C TO 80°C
6. GENERAL TOLERANCE:±0.20

TOLERANCE		SCALE	N. T. S
.X	±	UNITS	mm
.XX	±	MATERIAL	
∠	±1°		

HONSEAN 深圳市弘盛智能显示科技有限公司
SHENZHEN HONSEAN SMART DISPLAY TECHNOLOGY CO.,LTD

DRG DATE		MODEL:	BH035BS040A001WN
DRG BY	Welly	TITLE:	Page 1 OF 1
APPROVED	jan	P/N	VER. 01